



# VID-ALARM-PTZ-IN

Multichannel Alarm Card and Converter for PTZ


## Features:

- Watchdog, auto resets DVR after power failure and output the alarm signal
- 8-channel alarm inputs, 4-channel alarm outputs
- RS232- RS485 bi-directional converter, and the communication distance can up to 1200 M
- Static Resistance and thunder poof function

## SPECIFICATIONS

Power Voltage	12 VDC, DVR
Power Consumption	1 W
Communication	RS232
RS485 Output Protocol	SINGLE-DUPLEX, 1200 m DCTRLS
Baud rate	9600
Start up watch dog way	Open or Close by command
Alarm Input	8 Channel
Alarm Mode	Close
Alarm Output	4 Channel relay outputs
Alarm Linkage Mode	Host Control
Communication mode With Host	Host Ask
The dwell time of watch dog communication	1-200 s
Dimension	4.7" x 3.3" x 0.9" (120 x 85 x 22 mm)
Weight	- - -
<b>Warranty (Effective Jan 1, 2009)</b>	
1 Year	

© Aventura Technologies

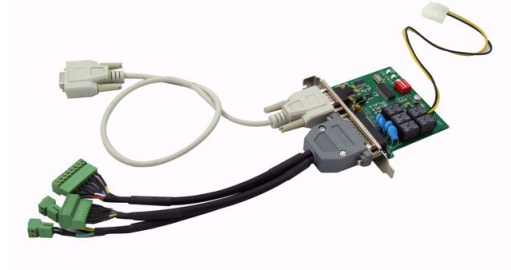

- 8 Alarm Inputs
- 4 Alarm Outputs
- Built-in RS-232-485 Converter for PTZ Control
- Watchdog Function
- For PC-Based DVR's

## AVAILABLE MODELS

Part number	Description
VID-ALARM-PTZ-IN	8 x 4 Multichannel Alarm Card and Converter for PTZ