

PART NUMBER

KAT177430 - XX

REV.


DATE

DESC.

INITIAL

Electrical Data

Impedance	50 Ohm
Frequency Range	DC - 3 GHz
Power Rating	1.0 Watts
V.S.W.R	1.20:1 Max.
Attenuation Values	1-10, 12, 15 & 20 dB
Attenuation Accuracy	± 0.3 dB

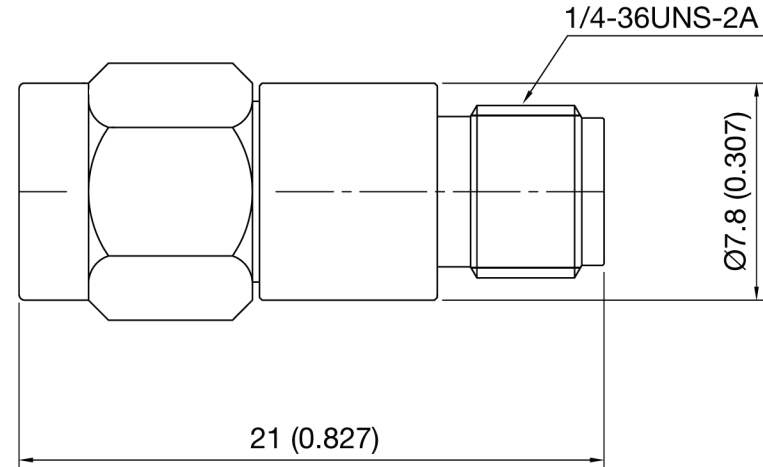

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KAT177430 - XX

DESCRIPTION

Fixed Attenuator - SMA Male to Female

CAGE CODE

664U0

SIGNATURE

X

Substitute XX in P/N with Attenuation Value (dB)**Materials**

Body
Center Contact
Nut and Washer
Insulator
O-Ring

Brass
Be-Cu
Brass
PTFE
Silicone Rubber

Nickel Plated
Gold Plated
Nickel Plated

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.