

PART NUMBER

KAT177445-XX

REV.

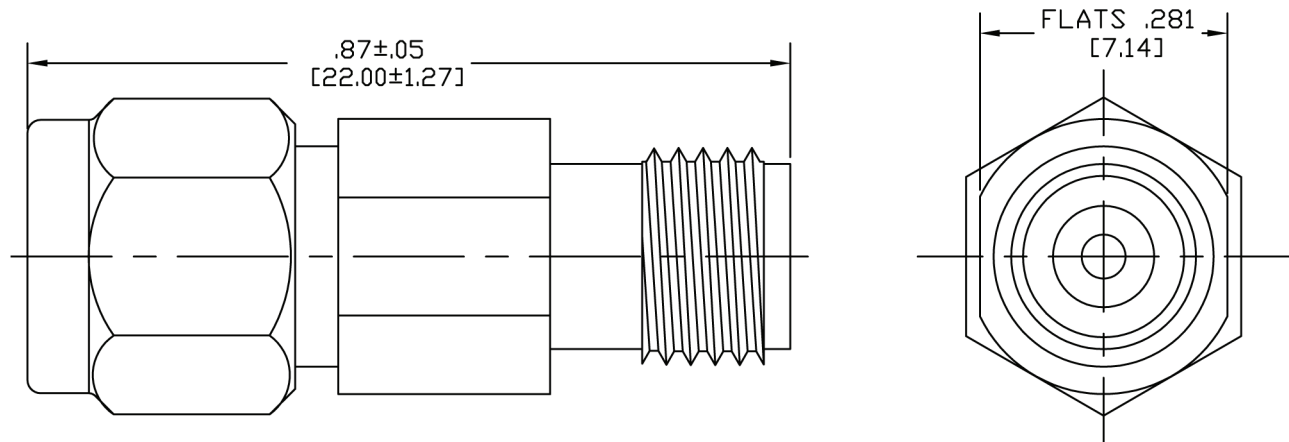
INITIAL

Electrical Data

Impedance 50 Ohm
 Frequency Range DC - 40GHz
 Temperature Range -55°C to +125°C
 Available dB Values 0-6, 8, 10, 15, 20 & 30 dB

Attenuation Accuracy	DC - 26.5GHz	DC - 40GHz
0-6, 8dB	±0.5dB	±0.8dB
10, 15 & 20dB	±0.6dB	±1.0dB
30dB	±0.8dB	±1.0dB

V.S.W.R (Max)	DC - 26.5GHz	DC - 40GHz
	<1.30	<1.40

RoHS Compliant**Konnect RF**

540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KAT177445-XXDESCRIPTION **Attenuator - 2.92mm - Fixed**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Materials**Contact
Body****Be-Cu
Stainless Steel****Gold Plated
Passivated****Insulator****High Temperature
Plastic Bead**